

FRONIUS PRIMO

/ The communicative inverter for optimised energy management.



/ SnapINverter Technology



/ Integrated data communication



/ SuperFlex Design



/ Dynamic Peak Manager



/ Smart Grid Ready



/ Zero feed-in



/ The Fronius Primo in power categories from 3.0 to 8.2 kW perfectly completes the SnapINverter generation. This single-phase, transformerless device is the ideal inverter for private households. Its innovative SuperFlex Design provides maximum flexibility in system design, while the SnapINverter mounting system makes installation and maintenance easier than ever before. The communication package included as standard, with WLAN, energy management, several interfaces and much more besides, makes the Fronius Primo a communicative inverter for owner-occupiers.

TECHNICAL DATA FRONIUS PRIMO (3.0-1, 3.5-1, 3.6-1, 4.0-1, 4.6-1)

| INPUT DATA | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|--|------------------------|------------------------|------------------------|------------------------|------------------------|
| Number of MPP trackers | | | 2 | | |
| Max. input current ($I_{dc \max 1} / I_{dc \max 2}$) | | | 12.0 A / 12.0 A | | |
| Max. array short circuit current (MPP_1/MPP_2) | | | 18.0 A / 18.0 A | | |
| DC input voltage range ($U_{dc \min} - U_{dc \max}$) | | | 80 - 1,000 V | | |
| Feed-in start voltage ($U_{dc \text{ start}}$) | | | 80 V | | |
| Usable MPP voltage range | | | 80 - 800 V | | |
| Number of DC connections | | | 2 + 2 | | |
| Max. PV generator output ($P_{dc \max}$) | 4.5 kW _{peak} | 5.3 kW _{peak} | 5.5 kW _{peak} | 6.0 kW _{peak} | 6.9 kW _{peak} |

| OUTPUT DATA | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|--|---------------------------------------|-------------|-------------|-------------|-------------|
| AC nominal output ($P_{ac,r}$) | 3,000 W | 3,500 W | 3,680 W | 4,000 W | 4,600 W |
| Max. output power | 3,000 VA | 3,500 VA | 3,680 VA | 4,000 VA | 4,600 VA |
| AC output current ($I_{ac \text{ nom}}$) | 13.0 A | 15.2 A | 16.0 A | 17.4 A | 20.0 A |
| Grid connection (voltage range) | 1 - NPE 220 V / 230 V (180 V - 270 V) | | | | |
| Frequency (frequency range) | 50 Hz / 60 Hz (45 - 65 Hz) | | | | |
| Total harmonic distortion | < 5 % | | | | |
| Power factor ($\cos \varphi_{ac,r}$) | 0.85 - 1 ind. / cap. | | | | |

TECHNICAL DATA FRONIUS PRIMO (3.0-1, 3.5-1, 3.6-1, 4.0-1, 4.6-1)

| GENERAL DATA | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|--|---|-------------|-------------|-------------|-------------|
| Dimensions (height x width x depth) | 645 x 431 x 204 mm | | | | |
| Weight | 21.5 kg | | | | |
| Degree of protection | IP 65 | | | | |
| Protection class | 1 | | | | |
| Overvoltage category (DC / AC) ¹⁾ | 2 / 3 | | | | |
| Night time consumption | < 1 W | | | | |
| Inverter design | Transformerless | | | | |
| Cooling | Regulated air cooling | | | | |
| Installation | Indoor and outdoor installation | | | | |
| Ambient temperature range | -40 - +55 °C | | | | |
| Permitted humidity | 0 - 100 % | | | | |
| Max. altitude | 4,000 m | | | | |
| DC connection technology | 4x DC+ and 4x DC- screw terminals 2.5 - 16 mm ² | | | | |
| AC connection technology | 3-pole AC screw terminals 2.5 - 16 mm ² | | | | |
| Certificates and compliance with standards | DIN V VDE 0126-1-1/A1, IEC 62109-1/2, IEC 62116, IEC 61727, AS 4777-2, AS 4777-3, G83/2, G59/3, CEI 0-21, VDE AR N 4105 | | | | |

| EFFICIENCY | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Max. efficiency | 98.0 % | 98.0 % | 98.0 % | 98.1 % | 98.1 % |
| European efficiency (η_{EU}) | 96.1 % | 96.8 % | 96.8 % | 97.0 % | 97.0 % |
| MPP adaptation efficiency | > 99.9 % | | | | |

| PROTECTIVE DEVICES | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|-----------------------------|---|-------------|-------------|-------------|-------------|
| DC insulation measurement | Yes | | | | |
| Overload behaviour | Operating point shift. Power limitation | | | | |
| DC disconnecter | Yes | | | | |
| Reverse polarity protection | Yes | | | | |


| INTERFACES | PRIMO 3.0-1 | PRIMO 3.5-1 | PRIMO 3.6-1 | PRIMO 4.0-1 | PRIMO 4.6-1 |
|--------------------------------------|---|-------------|-------------|-------------|-------------|
| WLAN / Ethernet LAN | Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON) | | | | |
| 6 inputs and 4 digital in/out | Interface to ripple control receiver | | | | |
| USB (A socket) ²⁾ | Datalogging, inverter update via USB flash drive | | | | |
| 2x RS422 (RJ45 socket) ²⁾ | Fronius Solar Net | | | | |
| Signalling output ²⁾ | Energy management (potential-free relay output) | | | | |
| Datalogger and Webservice | Included | | | | |
| External input ²⁾ | SO-Meter Interface / Input for overvoltage protection | | | | |
| RS485 | Modbus RTU SunSpec or meter connection | | | | |

¹⁾ According to IEC 62109-1.


²⁾ Also available in the light version.

Further information regarding the availability of the inverters in your country can be found at www.fronius.com.

FRONIUS PRIMO 8.2-1 EFFICIENCY CURVE

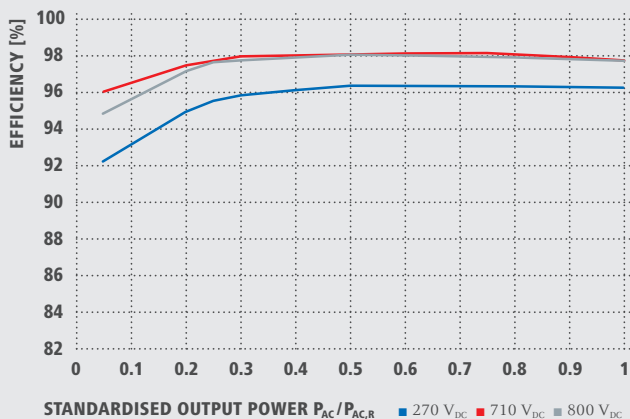

FRONIUS PRIMO 8.2-1 TEMPERATURE DERATING

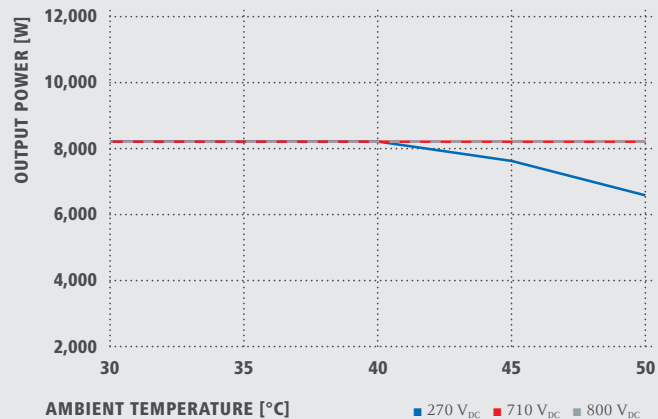

TECHNICAL DATA FRONIUS PRIMO (5.0-1, 5.0-1 AUS, 6.0-1, 8.2-1)

| INPUT DATA | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|--|------------------------|------------------------|------------------------|-------------------------|
| Number of MPP trackers | 2 | | | |
| Max. input current ($I_{dc \max 1} / I_{dc \max 2}$) | 12.0 A / 12.0 A | | 18.0 A / 18.0 A | |
| Max. array short circuit current (MPP ₁ /MPP ₂) | 18.0 A / 18.0 A | | 27.0 A / 27.0 A | |
| DC input voltage range ($U_{dc \min} - U_{dc \max}$) | 80 - 1,000 V | | | |
| Feed-in start voltage ($U_{dc \text{ start}}$) | 80 V | | | |
| Usable MPP voltage range | 80 - 800 V | | | |
| Number of DC connections | 2 + 2 | | | |
| Max. PV generator output ($P_{dc \max}$) | 7.5 kW _{peak} | 7.5 kW _{peak} | 9.0 kW _{peak} | 12.3 kW _{peak} |

| OUTPUT DATA | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|--|---------------------------------------|-----------------|-------------|-------------|
| AC nominal output ($P_{ac,r}$) | 5,000 W | 4,600 W | 6,000 W | 8,200 W |
| Max. output power | 5,000 VA | 5,000 VA | 6,000 VA | 8,200 VA |
| AC output current ($I_{ac \text{ nom}}$) | 21.7 A | 21.7 A | 26.1 A | 35.7 A |
| Grid connection (voltage range) | 1 - NPE 220 V / 230 V (180 V - 270 V) | | | |
| Frequency (frequency range) | 50 Hz / 60 Hz (45 - 65 Hz) | | | |
| Total harmonic distortion | < 5 % | | | |
| Power factor ($\cos \varphi_{ac,r}$) | 0.85 - 1 ind. / cap. | | | |

| GENERAL DATA | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|--|---|-----------------|-------------|-------------|
| Dimensions (height x width x depth) | 645 x 431 x 204 mm | | | |
| Weight | 21.5 kg | | | |
| Degree of protection | IP 65 | | | |
| Protection class | 1 | | | |
| Overvoltage category (DC / AC) ¹⁾ | 2 / 3 | | | |
| Night time consumption | < 1 W | | | |
| Inverter design | Transformerless | | | |
| Cooling | Regulated air cooling | | | |
| Installation | Indoor and outdoor installation | | | |
| Ambient temperature range | -40 - +55 °C | | | |
| Permitted humidity | 0 - 100 % | | | |
| Max. altitude | 4,000 m | | | |
| DC connection technology | 4x DC+ and 4x DC- screw terminals 2.5 - 16 mm ² | | | |
| AC connection technology | 3-pole AC screw terminals 2.5 - 16 mm ² | | | |
| Certificates and compliance with standards | DIN V VDE 0126-1-1/A1, IEC 62109-1/2, IEC 62116, IEC 61727, AS 4777-2, AS 4777-3, G83/2, G59/3, CEI 0-21, VDE AR N 4105 ²⁾ | | | |

¹⁾ According to IEC 62109-1.

²⁾ Fronius Primo 5.0-1, Fronius Primo 6.0-1 and Fronius Primo 8.2-1 are not fully compliant with VDE AR N 4105. Further information regarding the availability of the inverters in your country can be found at www.fronius.com.

| EFFICIENCY | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|-------------------------------------|-------------|-----------------|-------------|-------------|
| Max. efficiency | 98.1 % | 98.1 % | 98.1 % | 98.1 % |
| European efficiency (η_{EU}) | 97.1 % | 97.1 % | 97.3 % | 97.5 % |
| MPP adaptation efficiency | > 99.9 % | | | |

| PROTECTIVE DEVICES | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|-----------------------------|---|-----------------|-------------|-------------|
| DC insulation measurement | Yes | | | |
| Overload behaviour | Operating point shift, power limitation | | | |
| DC disconnecter | Yes | | | |
| Reverse polarity protection | Yes | | | |

| INTERFACES | PRIMO 5.0-1 | PRIMO 5.0-1 AUS | PRIMO 6.0-1 | PRIMO 8.2-1 |
|--------------------------------------|---|-----------------|-------------|-------------|
| WLAN / Ethernet LAN | Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON) | | | |
| 6 inputs and 4 digital in/out | Interface to ripple control receiver | | | |
| USB (A socket) ¹⁾ | Datalogging, inverter update via USB flash drive | | | |
| 2x RS422 (RJ45 socket) ¹⁾ | Fronius Solar Net | | | |
| Signalling output ¹⁾ | Energy management (potential-free relay output) | | | |
| Datalogger and Webservice | Included | | | |
| External input ¹⁾ | S0-Meter Interface / Input for overvoltage protection | | | |
| RS485 | Modbus RTU SunSpec or meter connection | | | |

¹⁾ Also available in the light version.

Further information and technical data can be found at www.fronius.com.

/ Perfect Welding / Solar Energy / Perfect Charging

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,700 employees worldwide, we shift the limits of what's possible - our record of over 800 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

v06 Apr 2016 EN

Fronius India Private Limited
GAT no 312, Nanekarwadi
Chakan, Taluka - Khed District
Pune 410501
India
pv-sales-india@fronius.com
www.fronius.in

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com